



Harkness Screens UK
Tel +44 (0) 1438 725200
Fax +44 (0) 1438 344400

E-Mail sales@harkness-screens.com
www.harkness-screens.com

Harkness Screens USA
Tel +1 (540) 370 1590
Fax +1 (540) 370 1592

ELECTRIC ROLLER SCREEN MAJOR PRO C PRODUCT DATA SHEET

Document Ref DS-056 Issue 5 Oct 2008


The Major Pro C is an electrically operated roller screen, incorporating a specially designed motor inside the roller to provide smooth, reliable and virtually silent operation for wall, ceiling or specialised mounting.

Application


Typical applications include:

- Conference centres
- Presentation suites
- Boardrooms
- Lecture theatres
- Educational establishments

All dimensions are in mm

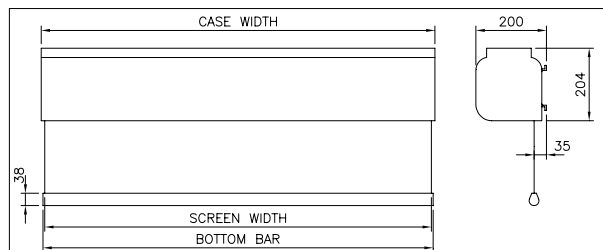

View of Roller Screen

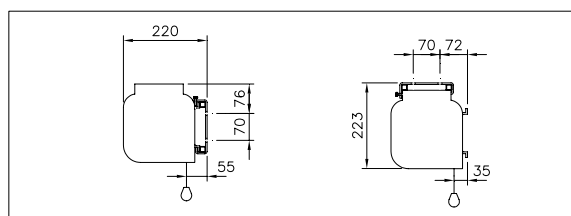

Typical Mounting Brackets

Stock Code	MAJPC 500/375	MAJPC 600/450	MAJPC 700/525
Viewing Area (w x h)	500 x 375cm (16.25 x 12.25ft)	600 x 450cm (19.5 x 14.6ft)	700 x 525cm (22.75 x 17ft)
Screen Width	500cm (16.25ft)	600cm (19.5ft)	700cm (22.75ft)
Screen Height	375cm (12.25ft)	450cm (14.6ft)	525cm (17ft)
Case	520cm (205ins)	620cm (244ins)	720 (284ins)
Bottom bar	516cm (203ins)	616cm (242ins)	716cm (281ins)
Weight (Approx)	95kg (209lb)	114kg (251lb)	133kg (293lb)

Screens will have horizontal seams

General Detail

Construction

Heavy gauge aluminium housing. Epoxy powder coated white ((RAL 9010 – 75% gloss).
Self-lubricating motor in roller, automatic thermal overload cutout, integral capacitor, gearbox and limit switches.
Ø152mm (6") aluminium tube screen roller mounted on two vibration and noise absorbing supports.

Mounting

Ceiling – bracket or suspended
Wall - bracket
Pipe / fly bar supports

Screen Surface

Maximum size 7000mm (22' 9") x 5250mm (17' 0")
Three standard sizes available – intermediate sizes to special order
Matt White – gain 1.0
Flame retardant classification M1 7201-96

Picture Size

Surface size is picture size

Operating

Mains cable (right-hand side entry) when viewed from the front
Power supply : 230V 50Hz
Standard rating : 3 amps
Consumption : 240W
Speed : 12rpm – 94mm/3.7" per sec.
Control station: up/down, wall mounted

Special Options

Black masking – 50mm (2") sides (except 7m units when surface size is less black border width).
Rear projection option.

Accessories

Remote/radio control – stock code RRC (screen modifications required).
Low voltage interface (LVI) 12v constant from mini-phono plug on projector.

NOTE:

Comprehensive installation instructions accompany screen.
Electrical connections should be completed by an appropriately qualified person.

In the interest of product enhancement, Harkness Screens reserves the right to introduce modifications or alterations without notice